
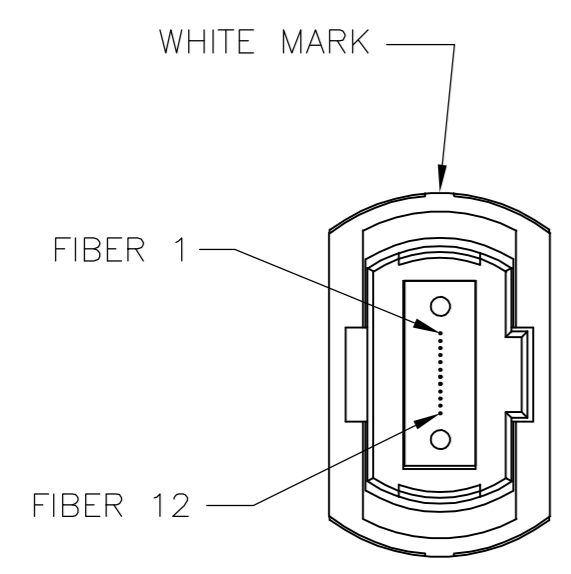


1. MAXIMUM CABLE ASSEMBLY INSERTION LOSS (1300nm): 1.6dB
2. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702.

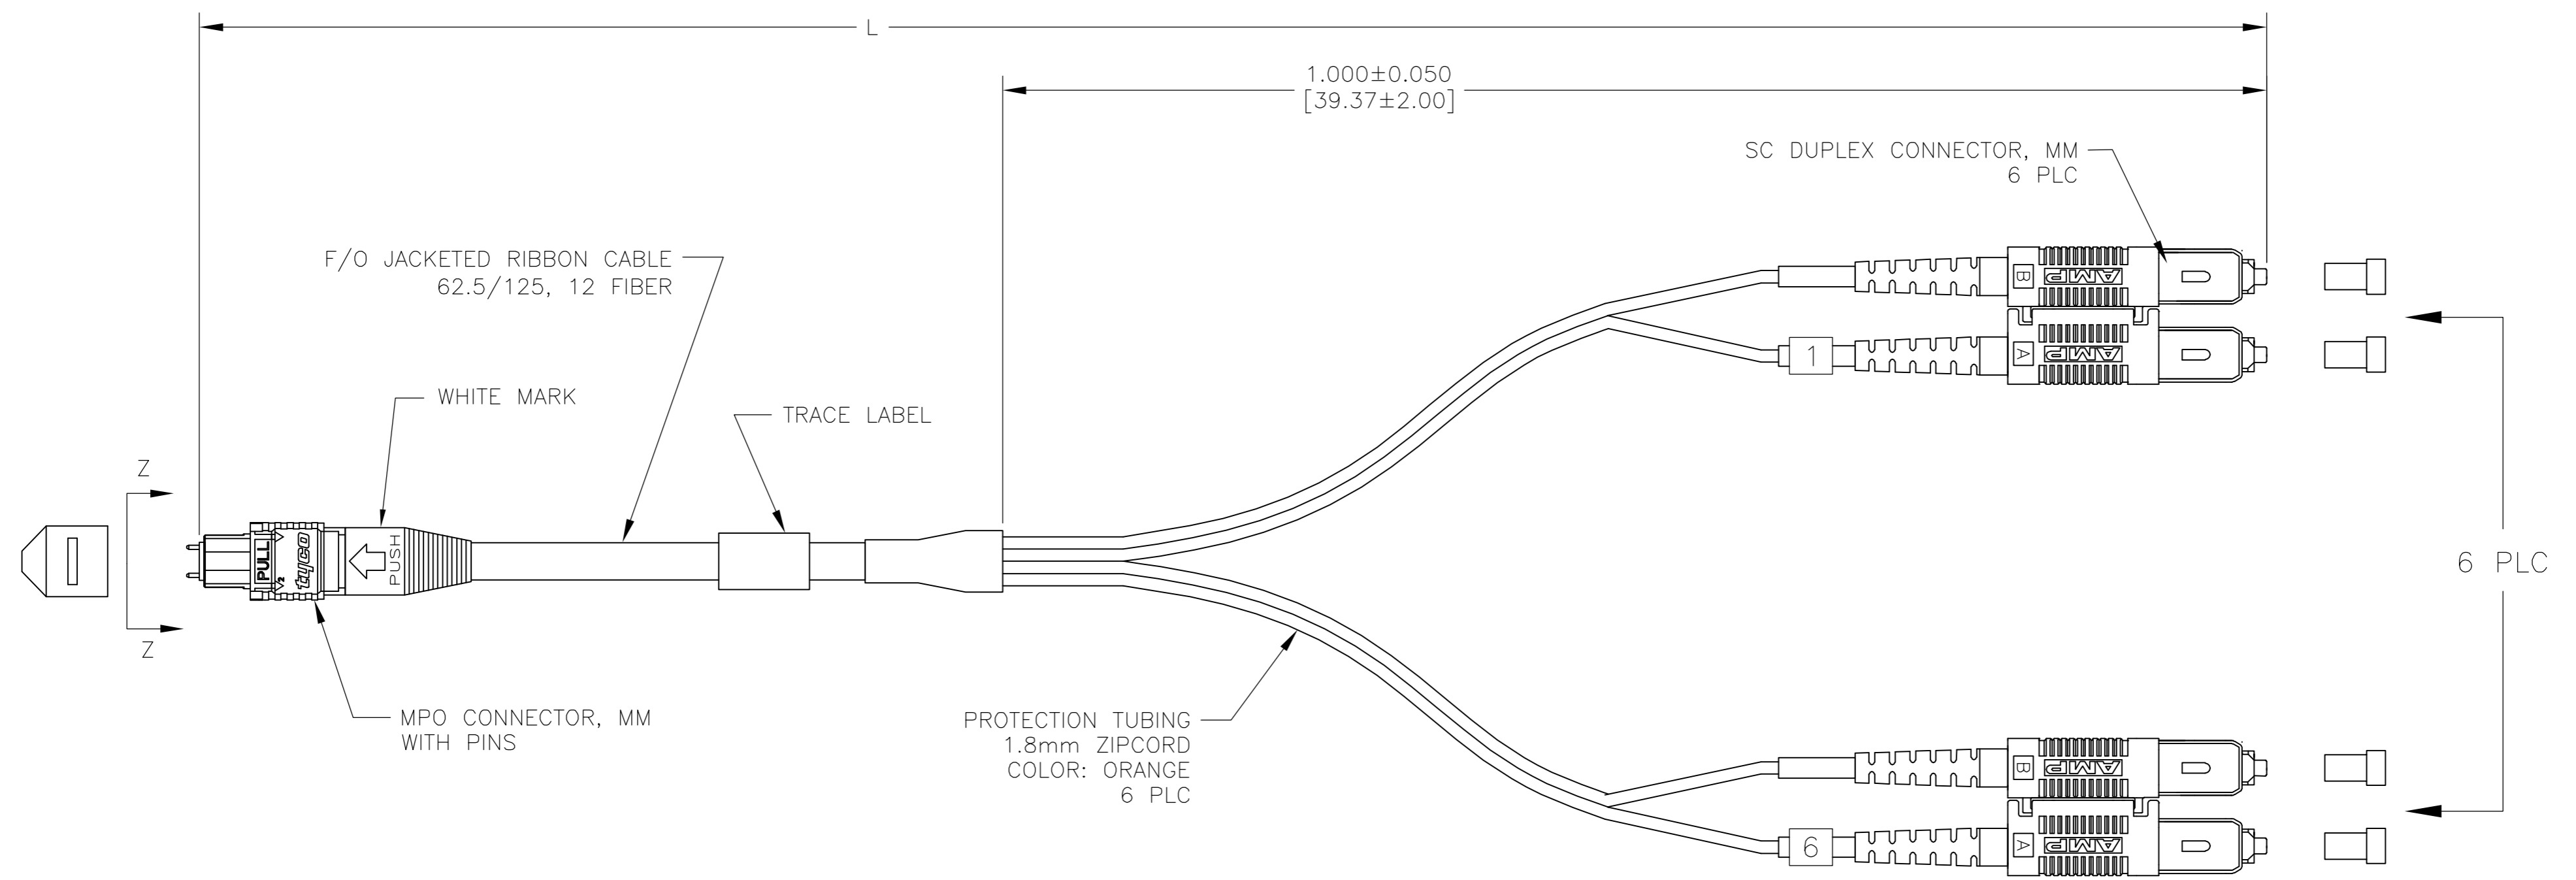

MPO FIBER #	SC CONNECTOR POSITION	SC CHANNEL NUMBER
1	A	1
2	B	1
3	A	2
4	B	2
5	A	3
6	B	3
7	A	4
8	B	4
9	A	5
10	B	5
11	A	6
12	B	6

MPO CONNECTOR FIBER PATH

15.000+0.300/-0.0 [590.5+11.8/-0.0]	1-5492363-5
8.000+0.300/-0.0 [315.0+11.8/-0.0]	5492363-8
6.000+0.300/-0.0 [236.2+11.8/-0.0]	5492363-6
2.000+0.150/-0.0 [78.7+5.9/-0.0]	5492363-2
L METERS [INCHES]	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN KATHY HE 28DEC05	 Tyco Electronics Corporation Harrisburg, PA 17105-3608														
DIMENSIONS: METERS [INCHES]		CHK J.BARRY 03JAN06															
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J.BARRY 03JAN06	NAME CABLE ASSEMBLY, FIBER OPTIC, 62.5/125, 12 FIBER JACKETED RIBBON MPO W/PINS TO 6 SC DUPLEX														
<table border="1"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± -</td></tr> <tr><td>3 PLC</td><td>± -</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± -</td></tr> <tr><td>FINISH</td><td>-</td></tr> </table>		0 PLC	± -	1 PLC	± -	2 PLC	± -	3 PLC	± -	4 PLC	± -	ANGLES	± -	FINISH	-	PRODUCT SPEC -	SIZE A2
0 PLC	± -																
1 PLC	± -																
2 PLC	± -																
3 PLC	± -																
4 PLC	± -																
ANGLES	± -																
FINISH	-																
MATERIAL		APPLICATION SPEC -	CAGE CODE 00779														
		WEIGHT -	DRAWING NO 5492363														
		CUSTOMER DRAWING	RESTRICTED TO -														
		SCALE NTS	SHEET 1 OF 1														
			REV A														