

PCB terminal block - PTQ 0,3/ 2-2,5 THR R32 - 1702610

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



PCB terminal block, Nominal current: 4 A, Nom. voltage: 160 V, Pitch: 2.5 mm, Number of positions: 2, Connection method: Insulation displacement connection QUICKON, Mounting: SMD/THT/THR, Conductor/PCB connection direction: 0 °, Color: black

Product Features

- Visual inspection of the conductor position possible
- Conductor connection without pretreatment
- 2.5 mm pitch
- THR solderable
- Taped as standard
- Supplied in tape-on-reel packing according to IEC 60286-3 for automated mounting
- Secure snap-on mechanism



Key commercial data

Packing unit	1 pc
Minimum order quantity	250 pc
Weight per Piece (excluding packing)	2.64 GRM
Custom tariff number	85369010
Country of origin	Germany

Technical data

Dimensions

Length	17.55 mm
Height	8 mm
Width	7 mm
Pitch	2.5 mm
Dimension a	2.5 mm
Pin dimensions	0,9 x 0,4
Pin spacing	2.5 mm

PCB terminal block - PTQ 0,3/ 2-2,5 THR R32 - 1702610

Technical data

Dimensions

Hole diameter	1.1 mm
---------------	--------

General

Range of articles	PTQ 0,3/..-THR
Insulating material group	IIIa
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/3)	160 V
Rated voltage (III/2)	160 V
Rated voltage (II/2)	200 V
Nominal current I_N	4 A
Nominal cross section	0.34 mm ²
Maximum load current	4 A
Insulating material	LCP
Solder pin surface	Sn
Inflammability class according to UL 94	V0
Number of positions	2

Connection data

Conductor cross section solid min.	0.14 mm ²
Conductor cross section solid max.	0.34 mm ²
Conductor cross section stranded min.	0.14 mm ²
Conductor cross section stranded max.	0.34 mm ²
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	22
Maximum AWG according to UL/CUL	24
Wire diameter incl. insulation	1.6 mm (Terminal block is tested with PVC insulation - other insulation materials available on request)

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27141109
eCl@ss 5.0	27141190
eCl@ss 5.1	27141190
eCl@ss 6.0	27261101

PCB terminal block - PTQ 0,3/ 2-2,5 THR R32 - 1702610

Classifications

eCl@ss

eCl@ss 7.0	27440401
eCl@ss 8.0	27440401

ETIM

ETIM 4.0	EC002643
ETIM 5.0	EC002643

UNSPSC

UNSPSC 6.01	30211801
UNSPSC 7.0901	39121432
UNSPSC 11	34131203
UNSPSC 12.01	39121432
UNSPSC 13.2	39121432

Approvals

Approvals


Approvals

UL Recognized / VDE Gutachten mit Fertigungsüberwachung / cUL Recognized / CCA / IECCE CB Scheme / cULus Recognized

Ex Approvals


Approvals submitted


Approval details

UL Recognized 	
	B
mm ² /AWG/kcmil	24
Nominal current I _N	2 A
Nominal voltage U _N	150 V


PCB terminal block - PTQ 0,3/ 2-2,5 THR R32 - 1702610


Approvals

VDE Gutachten mit Fertigungsüberwachung 	
Nominal current IN	4 A
Nominal voltage UN	130 V

cUL Recognized 	
	B
mm ² /AWG/kcmil	24
Nominal current IN	2 A
Nominal voltage UN	150 V

CCA	
mm ² /AWG/kcmil	0.2-2.5
Nominal current IN	4 A
Nominal voltage UN	130 V


IECEE CB Scheme 	
mm ² /AWG/kcmil	0.2-2.5
Nominal current IN	4 A
Nominal voltage UN	130 V

cULus Recognized 	
--	--


Drawings

PCB terminal block - PTQ 0,3/ 2-2,5 THR R32 - 1702610


Dimensioned drawing

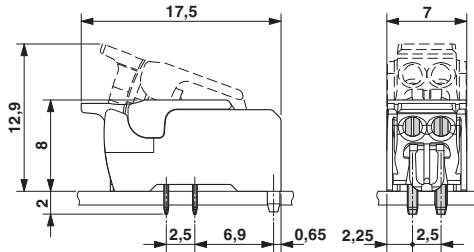

Drilling diagram

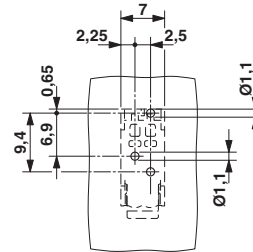

Diagram

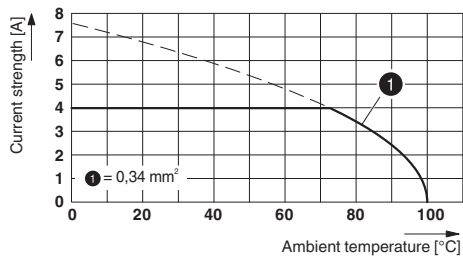

Type: PTQ 0,3/..-2,5(-L) THR R32

Dimensioned drawing

