


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

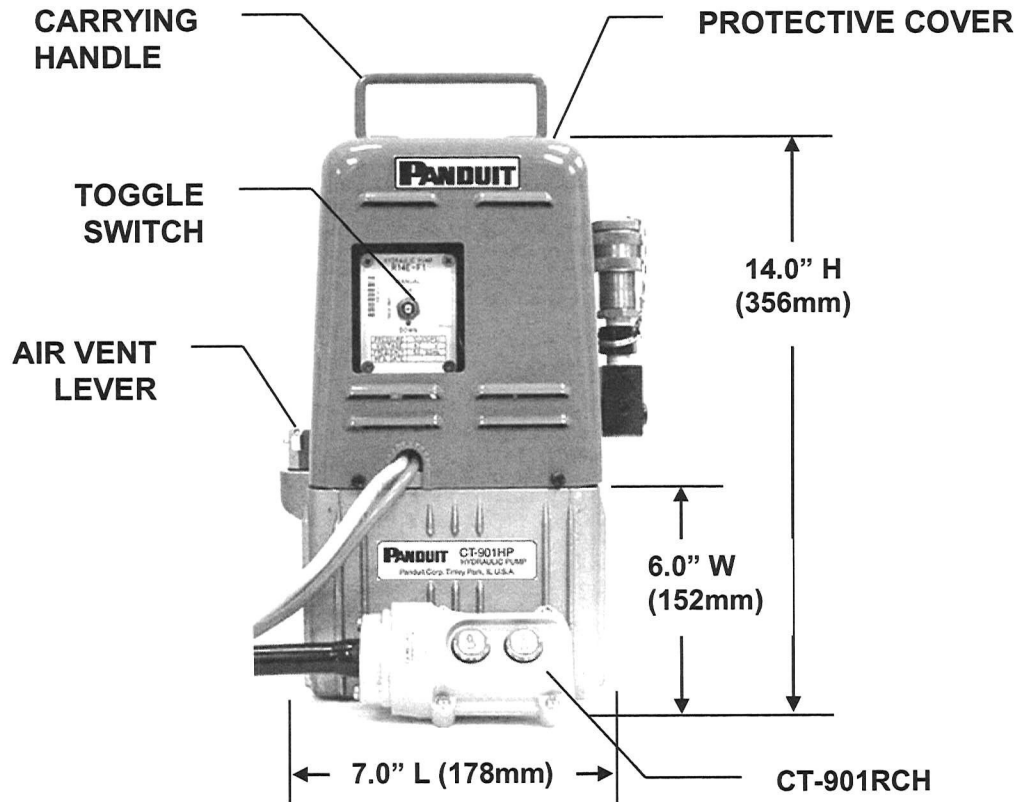

NOTES, UNLESS OTHERWISE SPECIFIED:

FULLY AUTOMATIC PUMP SPECIFICATIONS

MOTOR:

Type: Commutator
 RPM: 1200
 Voltage: AC 120V
 Frequency: 50/60 Hz
 Current: 6.5A
 Horsepower: 1/2

PUMP:

Low Pressure: 20kg/cm² (300 psi)
 Delivery: 2.6 Liters/Min.
 High Pressure: 600 Kg/cm² (10,000 psi)
 Delivery: .32 Liters/Min.
 Oil Tank Cap.: 2 Liters
 Weight: 15 kg (33 lbs.)
 Fluid Type: Shell Tellus S2V15 Hydraulic Oil
 Housing Color: Orange

SEE SHEET 2 FOR FEATURES

F:\wrkgrp\rvusers\ENGR DOCS\CUST DWGS\TP24507A01_02 CT-901HP CD.doc

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	CT-901HP HYDRAULIC PUMP CUSTOMER DRAWING					
---	-----	----	----	----	UPD PHOTO, UPD BRANDING AND DWG.	----	ITEM REVISION NAME: TP24507A01_02				PANDUIT	
02	5-23-13	BLR			TEMPLATE; CHNG TO SHELL TELLUS S2V15 OIL	4609	UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.x) ± --- (.xxx) ± --- (.xx) ± --- ANGLES ± ---					MATERIAL: NONE
01	8-03-07	BLR	BJPU	ABJ	REDRAWN	4255	THIRD ANGLE PROJECTION				DRAWING NUMBER: TP24507A01	
---	---	---	---	---	---	---	DRAWN BY: BLR	DATE: 8-03-07	CHK BJPU	SCALE NONE	SHT 1 OF 2	SIZE A

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTE: Used with separate crimping head, hydraulic pump and hose

- Crimps with CT-930CH, CT-940CH, and CT-980CH remote crimping heads:
 - CT-930CH – Accepts up to 750MCM Copper (600MCM Aluminum) lugs (400MCM Copper and Aluminum splices). Also specific C-Taps and H-Taps.
 - CT-940CH – Accepts up to 1500MCM Copper (1000MCM Aluminum) lugs and splices. Also specific C-Taps and H-Taps.
 - CT-980CH – Accepts 4 AWG to 750MCM Copper and Aluminum lugs and splices.

- CT-900HPH pre-filled hydraulic 10 foot hose

FEATURES:

- Manual Control
- Remote pump control
- Pressure adjustment 300 to 10,000 psi
- Visual fluid level
- External air vent and filler port
- Heavy gauge steel protective cover
- Two stage pumping action
- Automatic bypass when predetermined pressure is reached – pump shuts off automatically
- Built-in electrical solenoid switch to allow quick release of any cutter or crimper
- Small, compact, portable unit with carrying handle – standard 3/8” connection

SEE SHEET 1 FOR TOOL SPECIFICATIONS

F:\wrkgrp\rvusers\ENGR DOCS\CUST DWGS\TP24507A01_02 CT-901HP CD.doc

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	CT-901HP HYDRAULIC PUMP CUSTOMER DRAWING				
02	5-22-13	----	----	----	SEE SHEET 1	----	ITEM REVISION NAME: TP24507A01_02				
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:							MATERIAL: NONE				
(.x) ± -- (.xxx) ± -- (.xx) ± -- ANGLES ± --							DRAWING NUMBER: TP24507A01				
							THIRD ANGLE PROJECTION				
DRAWN BY:		DATE:		CHK		SCALE		SHT 2 OF 2		SIZE	
BLR		8-03-07		BJPU		NONE				A	