
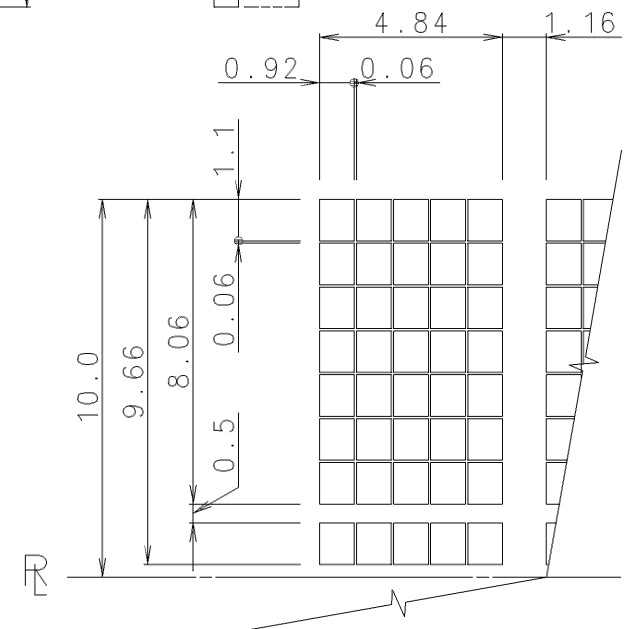
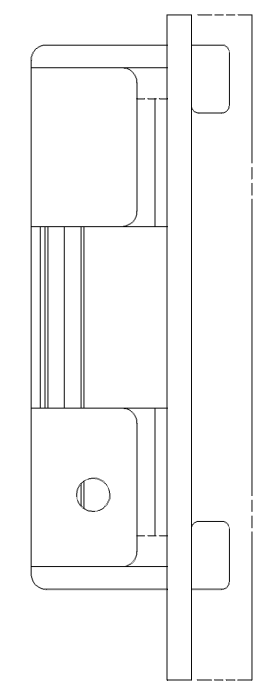



ISSUE	REVISIONS	DRAWN	DATE
1	MISPRINT CORRECTION. ADDITION OF VIEWING DIRECTION.	N.Nakayama	MAR.23'06

PIN ASSIGNMENT


PIN No.	SYMBOL
1	V <sub>SS</sub>
2	V <sub>DD</sub>
3	V <sub>EE</sub>
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED CATHODE
16	LED ANODE

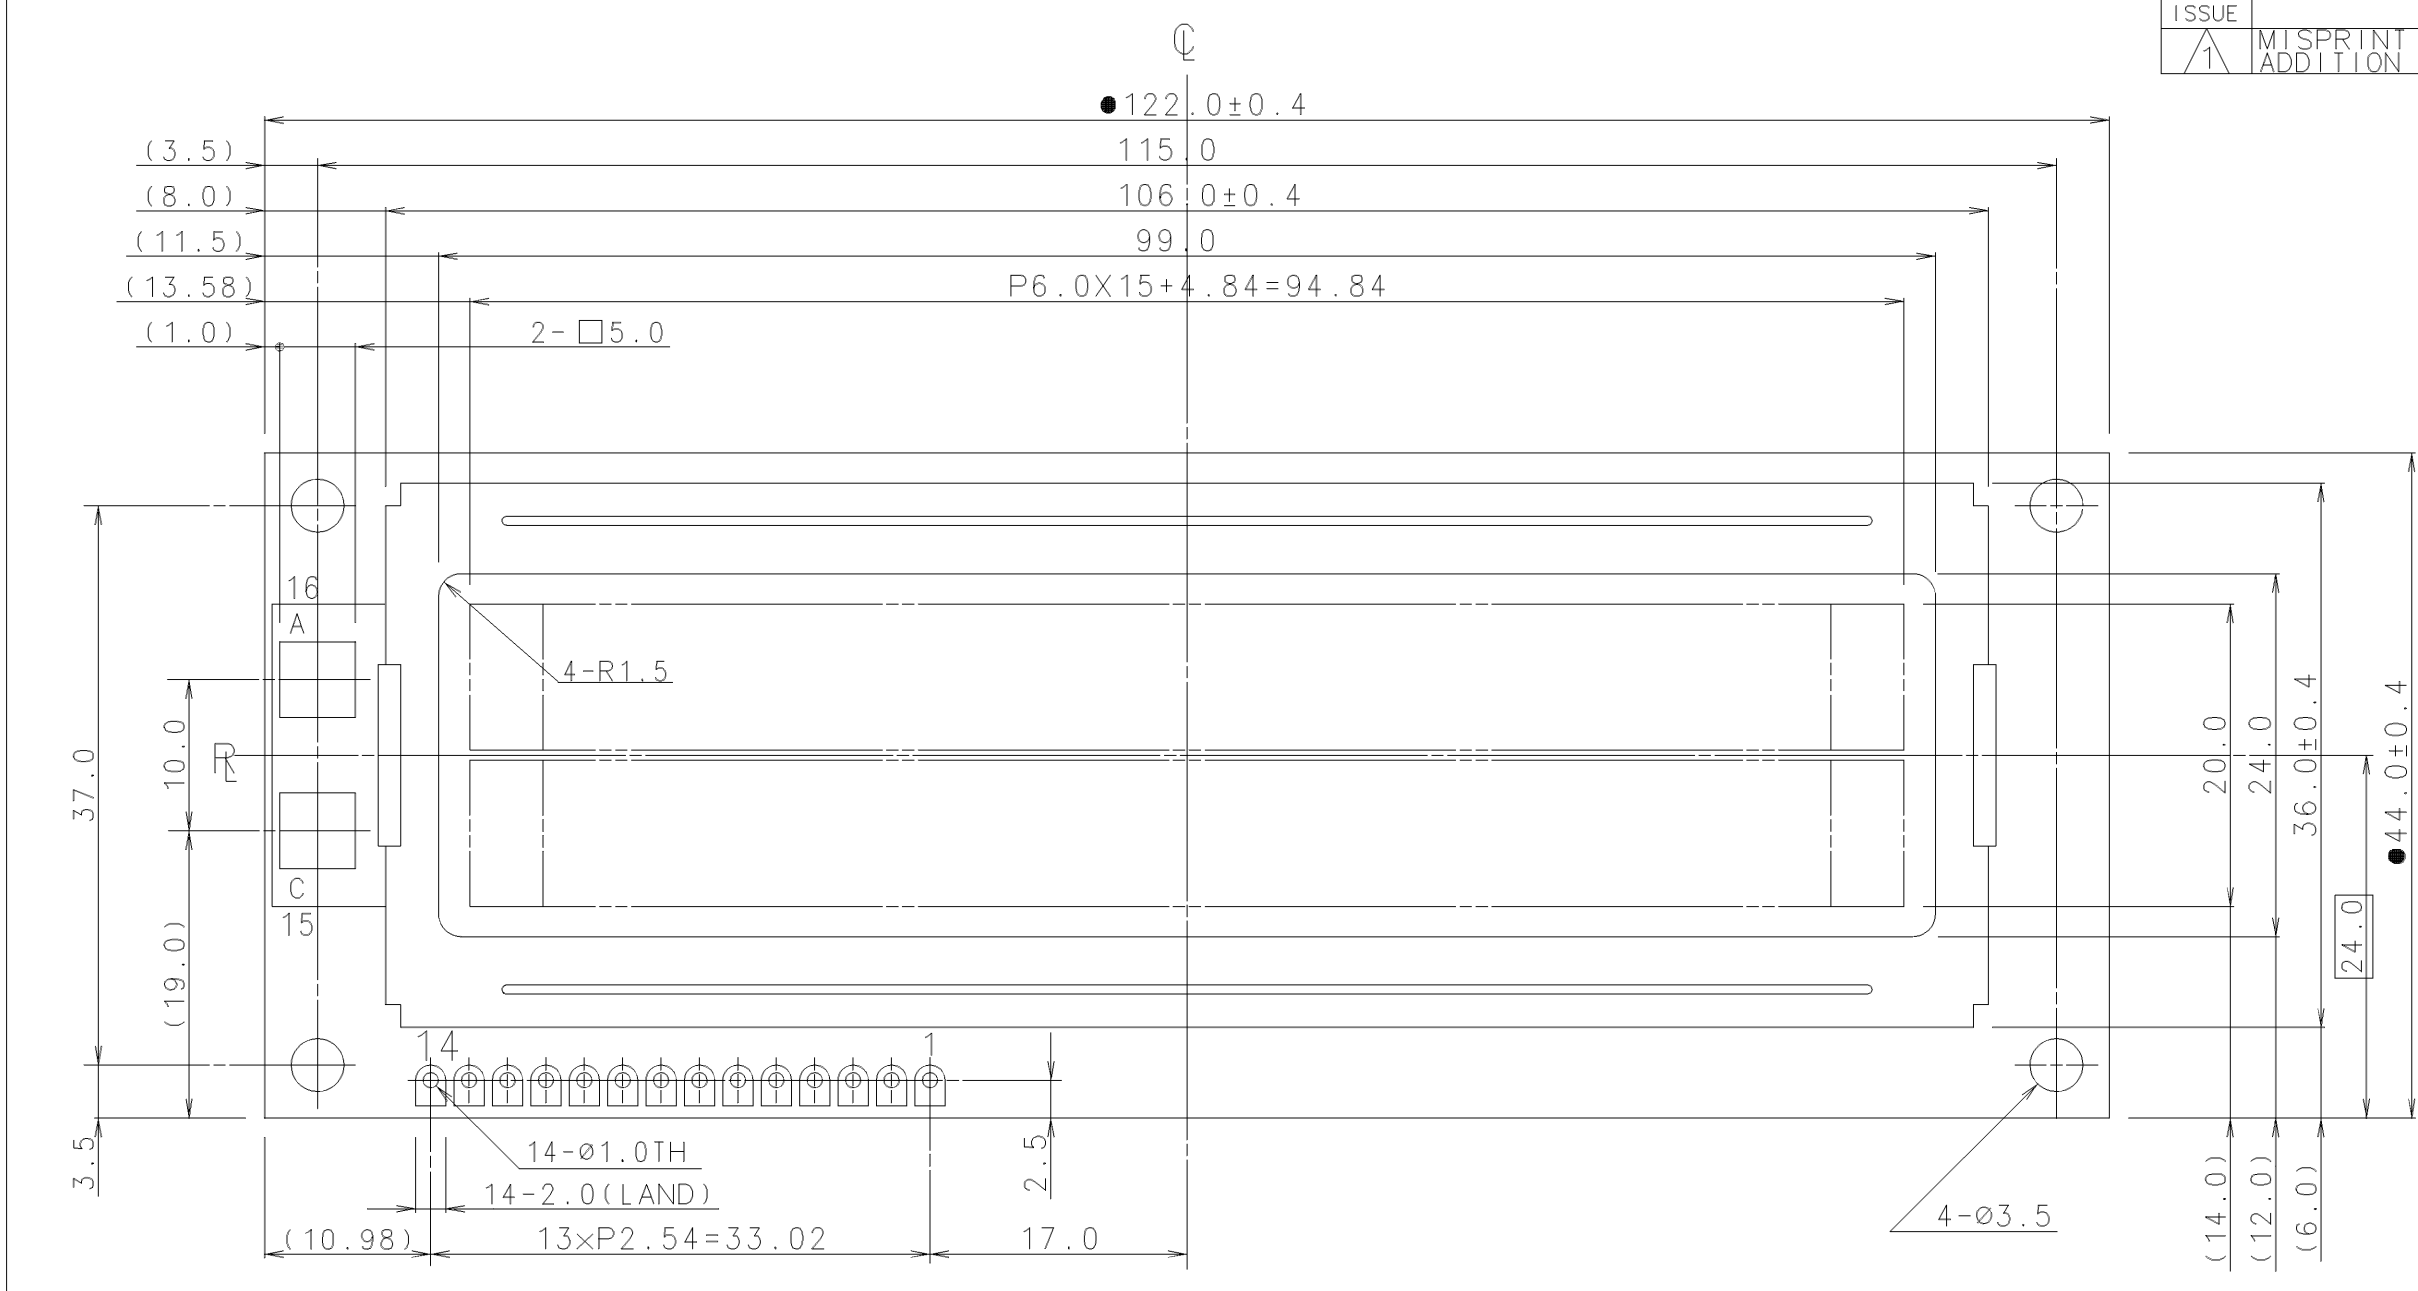

↑ VIEWING DIRECTION  $\triangle$

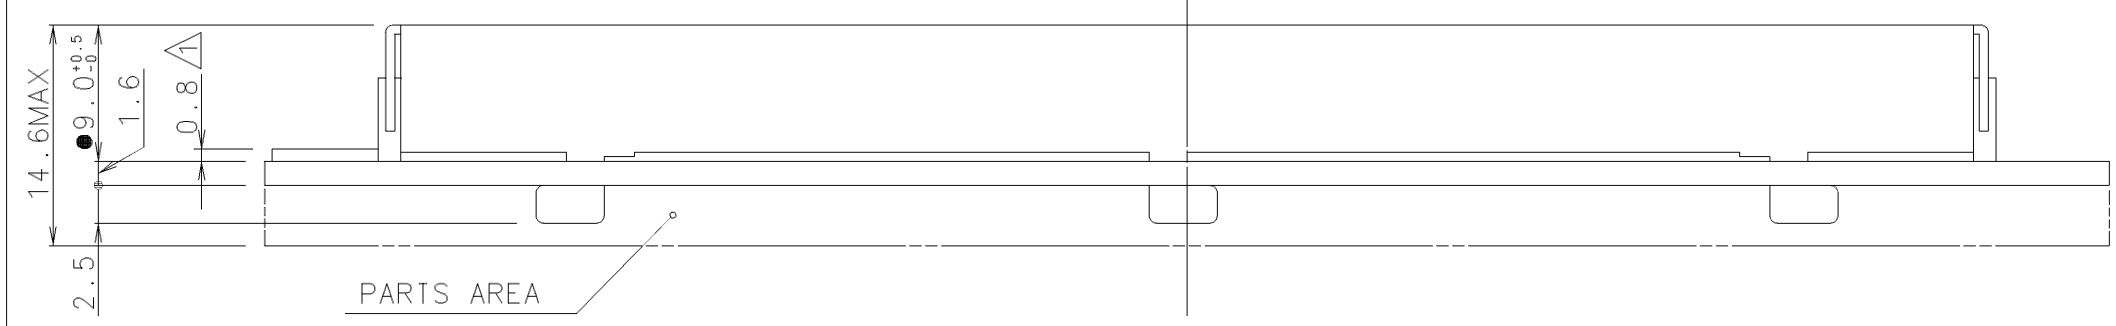

TOLERANCE			
MEASURE	A	B	C
L ≤ 16	±0.1	±0.3	±1
16 < L ≤ 63	±0.2	±0.5	±1.5
63 < L ≤ 250	±0.3	±0.8	±2
250 < L ≤ 500	±0.5	±1.2	±3
500 < L	±0.8	±2	±4
ANGLE	±1°	±5°	±10°

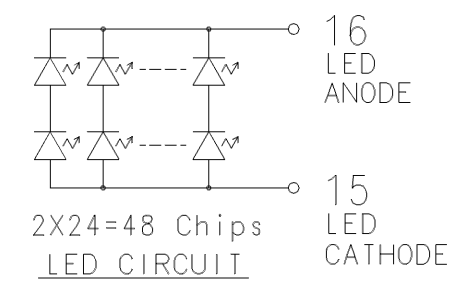

NOTES  
 1) DON'T USE MATERIAL WHICH ARE PROHIBITED BY RoHS.  
 2) THE DIMENSIONS WITH THE MARK ● ARE CONTROLLED AS A PARTICULAR CHARACTERISTIC.

MATERIAL:		FINISH:	
DATE 2006/03/24	THIRD ANGLE PROJECTION	<b>OPTREX CORPORATION</b>	
APPROVED Sadao Matsuoka	SCALE UNIT 2:1 mm		
CHECKED Yutaka Takada	DATENO.04'05	TITLE DIMENSIONAL OUTLINE	
DRAWN Miki Nakayama	DSGN T.Yuchi	DWG NO.(CODE) DMC16230 ED series	DWG REV A
		DWG SIZE A3	