



View on mating side

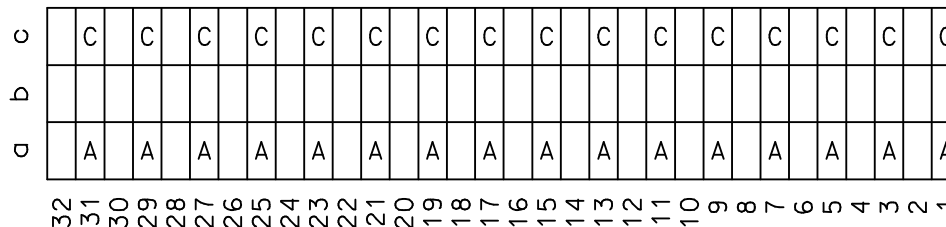

A = 16 standard contacts L=3
 C = 16 standard contacts L=3
 S = 32 total number of contacts

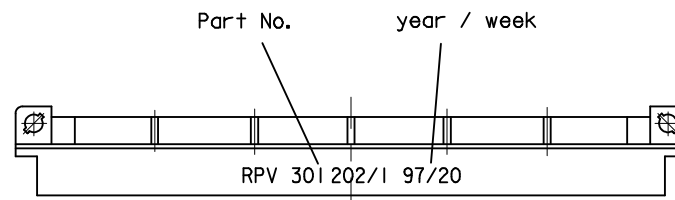

Printing beside row c

Marking	Customer special
Performance level	Customer special
Flux proof	no
Fixing clip	no
Dimensions	SDA-85003-0001 sht.7
Technical Data	PS-85003-0001

C	special	c1+3+5+7....31
A	special	a1+3+5+7....31
Contact symbol	Perform. level	Contact position number

ENTER DESCRIPTION EC NO: I2009-0240 DRWN:PJT 2008/11/28 CHKD:MR HARSHA 2008/11/29 APPR:KPRASAD 2008/11/29	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION																
		<table border="1"> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> <tr> <td>4 PLACES</td> <td>±---</td> <td>±---</td> </tr> <tr> <td>3 PLACES</td> <td>±---</td> <td>±---</td> </tr> <tr> <td>2 PLACES</td> <td>±---</td> <td>±---</td> </tr> <tr> <td>1 PLACE</td> <td>±---</td> <td>±---</td> </tr> </table>			mm	INCH	4 PLACES	±---	±---	3 PLACES	±---	±---	2 PLACES	±---	±---	1 PLACE	±---	±---	DRAWN BY DATE CA 1997/05/16		TITLE 96 POS. MALE DIN CONNECTOR RPV 301 202/1			
			mm	INCH																				
		4 PLACES	±---	±---																				
3 PLACES	±---	±---																						
2 PLACES	±---	±---																						
1 PLACE	±---	±---																						
ANGULAR ±---°		CHECKED BY DATE KN 1997/05/16		APPROVED BY DATE JB 1997/05/16																				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. ENTER PART		DOCUMENT NO. SDA-85300-0464				SHEET NO. 1 OF 00																