


NOTES: UNLESS OTHERWISE SPECIFIED

- CONSTRUCTION:
 THUMB SCREW, INSULATOR & MOUNT BASE:
 MOLDED NYLON. AVAILABLE IN BLACK
 OR RED.
 FRAME: NICKEL PLATED BRASS FRAME.

- PERFORMANCE:
 MAXIMUM CURRENT: 15 AMPS
 MAXIMUM VOLTAGE: 500 VDC
 MAXIMUM TEMPERATURE: 122°F (50°C)

- FEATURES:
 ACCEPTS SHROUDED AND
 STANDARD BANANA PLUGS.
 FOR PANEL THICKNESS UP TO
 0.250 [6.35]

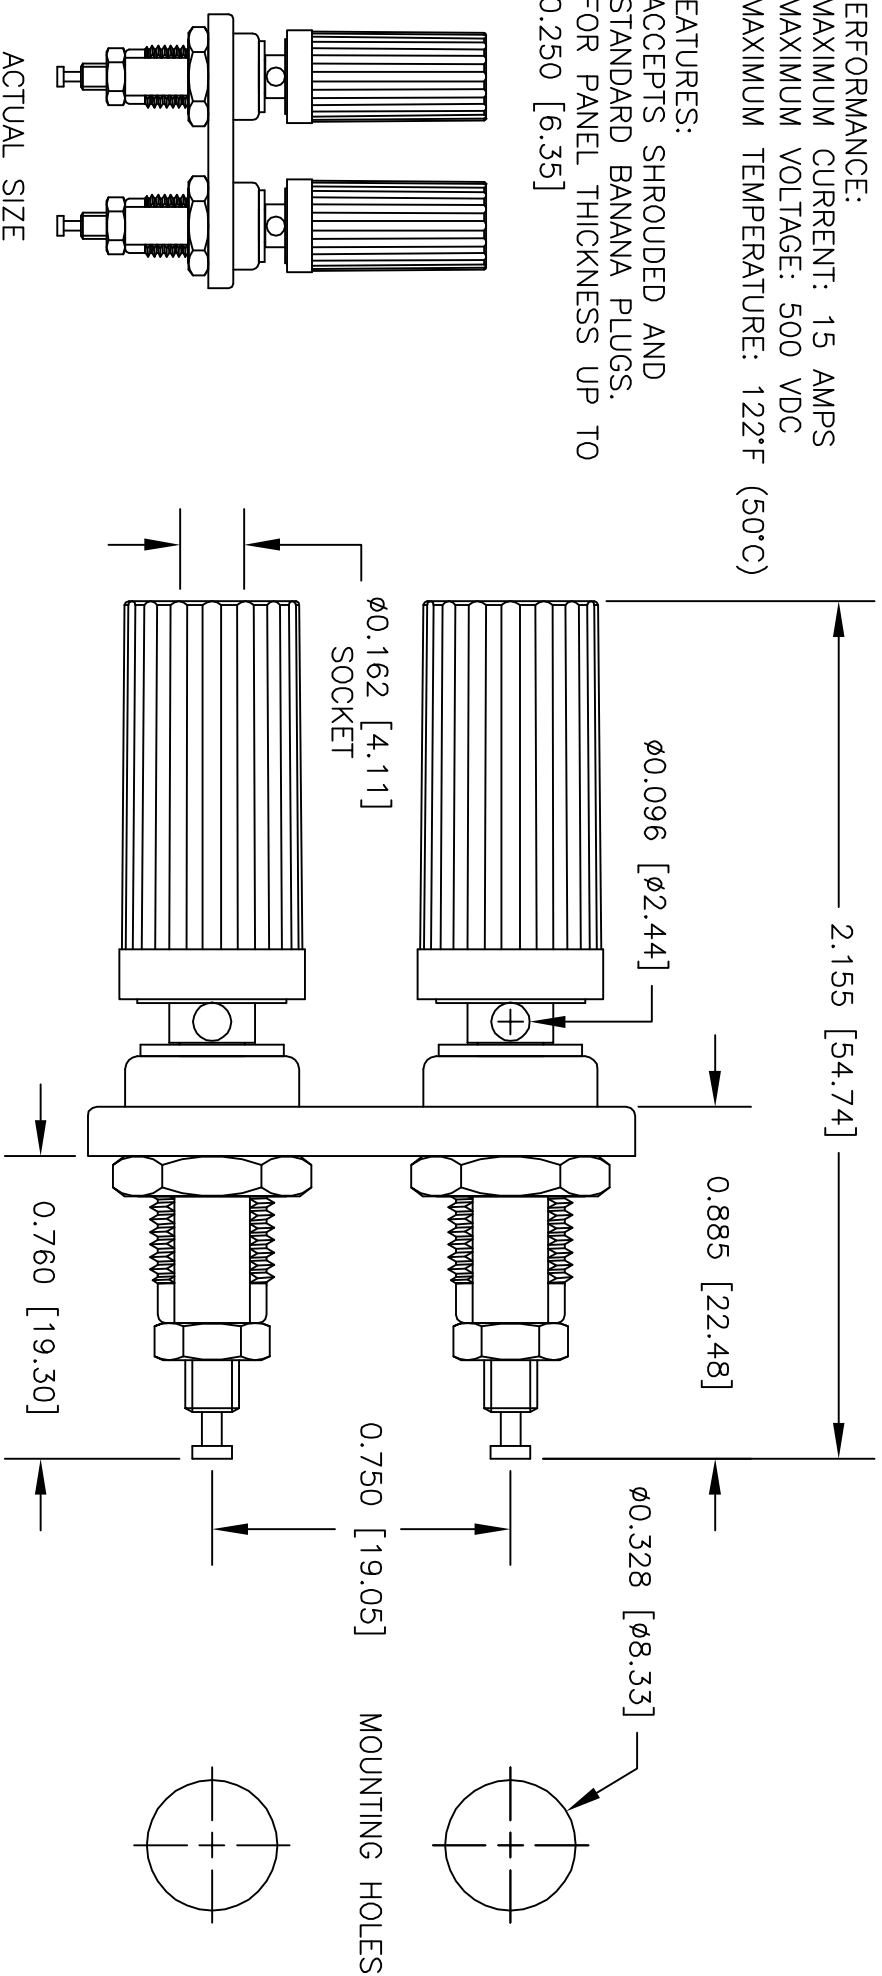

ACTUAL SIZE

| | | | | | |
|---|--------|--------------|---|---|--|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES | | CONTRACT NO. | | DESCRIPTION | |
| ± | .XX ± | ± | ± | DRAWN | E-ZHOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A. |
| ± | .XXX ± | ± | ± | APPROVED BY | |
| ± | .XXX ± | ± | ± | DATE | |
| MATERIAL SEE NOTE. | | APPROVALS | | DBL SHROUDED OR STD BAN PLUG BINDING POST | |
| FINISH SEE NOTE. | | R.L. | | SIZE CODE IDENT NO. DRAWING NO. | |
| NEXT ASSY USED ON | | 2/11 | | A 08505 9406 | |
| APPLICATION DO NOT SCALE DRAWING | | | | SCALE 2:1 | |
| | | | | SHEET 1 OF 1 | |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-ZHOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-ZHOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.

| LTR | DESCRIPTION | REVISIONS | DATE | APPROVED |
|-----|-------------|-----------|------|----------|
| | | | | |