

## Base strip - PTSM 0,5/ 6-HH-2,5-SMD WH R44 - 1708015

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Header, Nominal current: 6 A, Rated voltage (III/2): 160 V, Pitch: 2.5 mm, Color: white, Contact surface: Tin, Mounting: Taped SMD/THT/THR components, Article with anti-rotation pin



The illustration shows a 3-position version

### Product Features

- Compatible with PTSM.../PTPM... plugs
- High current carrying capacity of 6 A
- Supplied in tape-on-reel packing according to IEC 60286-3 for automated mounting
- Rugged solder anchor for secure, mechanical fixing to the surface
- Specifically designed for use in dedicated SMT processes
- 



### Key commercial data

Packing unit	1 pc
Minimum order quantity	600 pc
Custom tariff number	85369010
Country of origin	Germany

### Classifications

#### eCl@ss

eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 8.0	27440402

#### ETIM

ETIM 4.0	EC002637
ETIM 5.0	EC002637

# Base strip - PTSM 0,5/ 6-HH-2,5-SMD WH R44 - 1708015

Approvals

Approvals

Approvals

UL Recognized / UL Recognized

Ex Approvals

Approvals submitted

Approval details


UL Recognized

UL Recognized


	B
Nominal current I <sub>N</sub>	5 A
Nominal voltage U <sub>N</sub>	150 V

Drawings

Drilling diagram

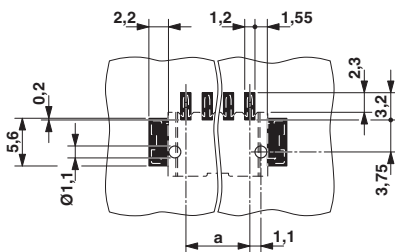

Diagram

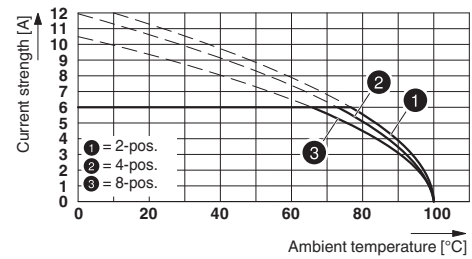

Derating curve for: PTSM 0,5/..-P-2,5 with PTSM 0,5/..-HH-2,5-SMD R..

## Base strip - PTSM 0,5/ 6-HH-2,5-SMD WH R44 - 1708015

Dimensional drawing

